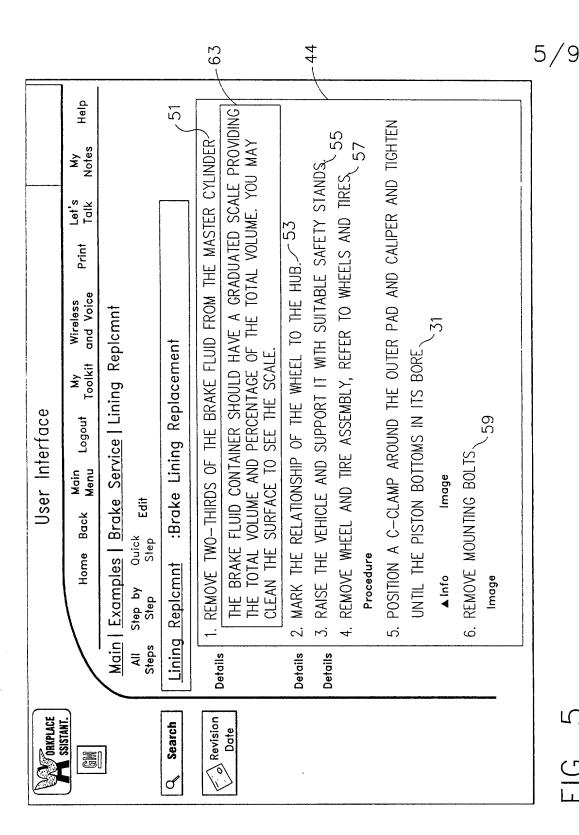


User Interface	Home Back Menu Logout Toolkit and Voice Print Talk Notes	Examples   Brake Service   Lining Replomnt Step by Quick Edit	epicmnt :Brake Lining Replacement	POSITION A C-CLAMP AROUND THE OUTER PAD AND CALIPER AND TIGHTEN UNIT UNTIL THE PISTON BOTTOMS IN ITS BORE	■ INFO IMAGE TO ACCESS IMAGE 41 OF FIG. 4	
ORRPLACE		Main	1	Revision 5. POSITION A UNIT UNTIL	NF(	_

:<u>|</u>G. 3

3/9

FIG. 4





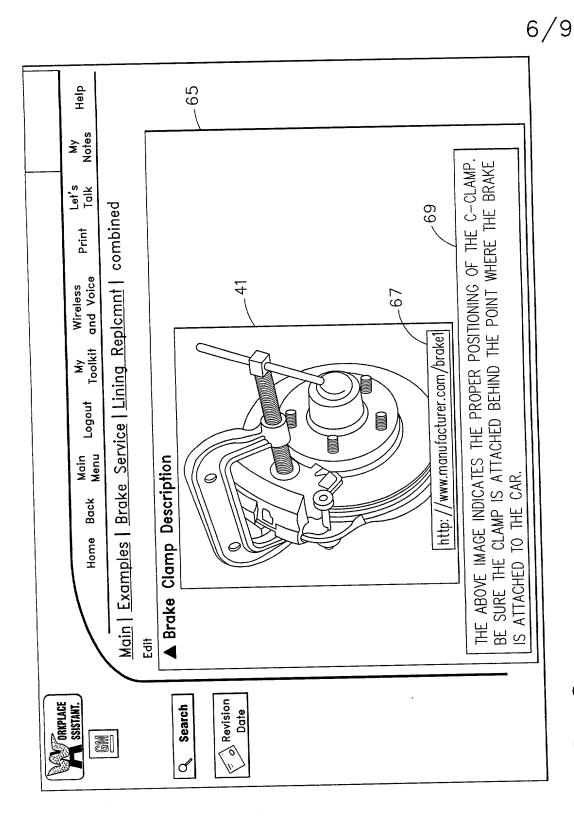


FIG. 6

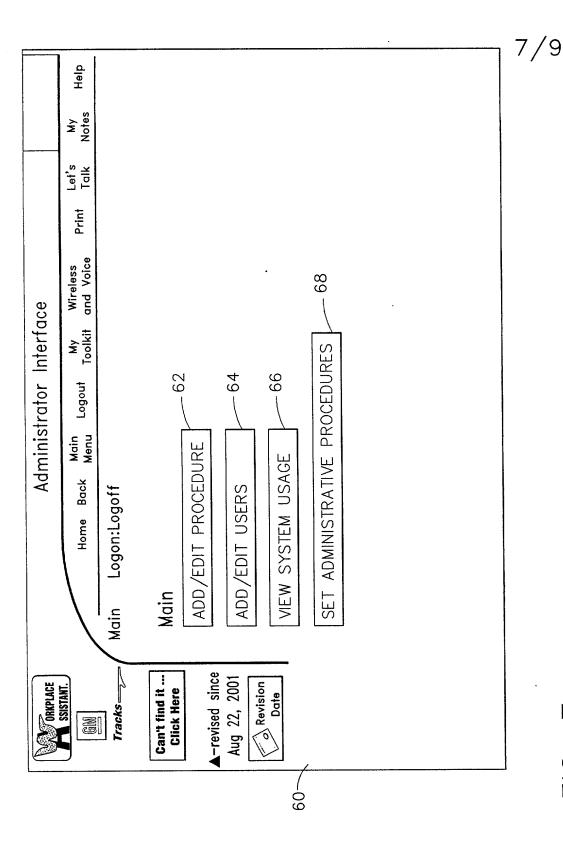

-1G. /

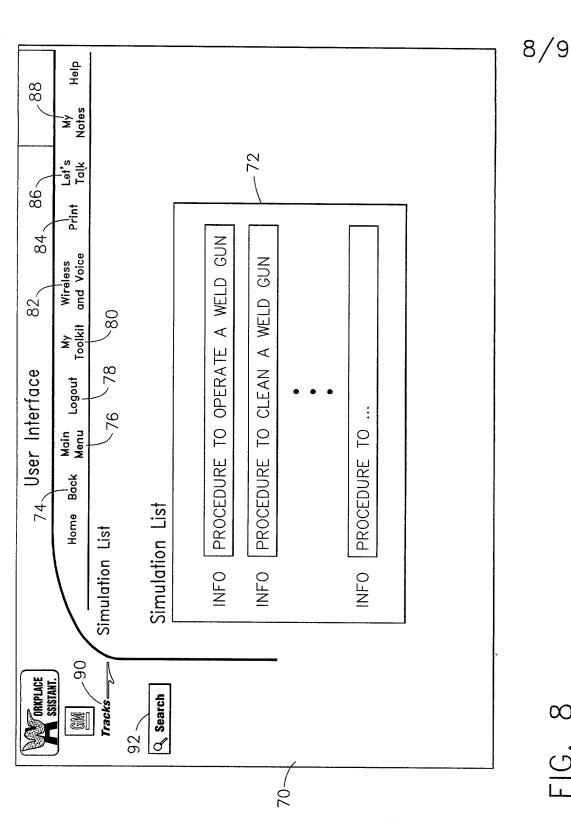

## 6P-301227

